


## Features

- Individual pair shielding
- Low capacitance
- Very good electromagnetic protection
- Halogen-free sheath

RS Stock NO : 2010523

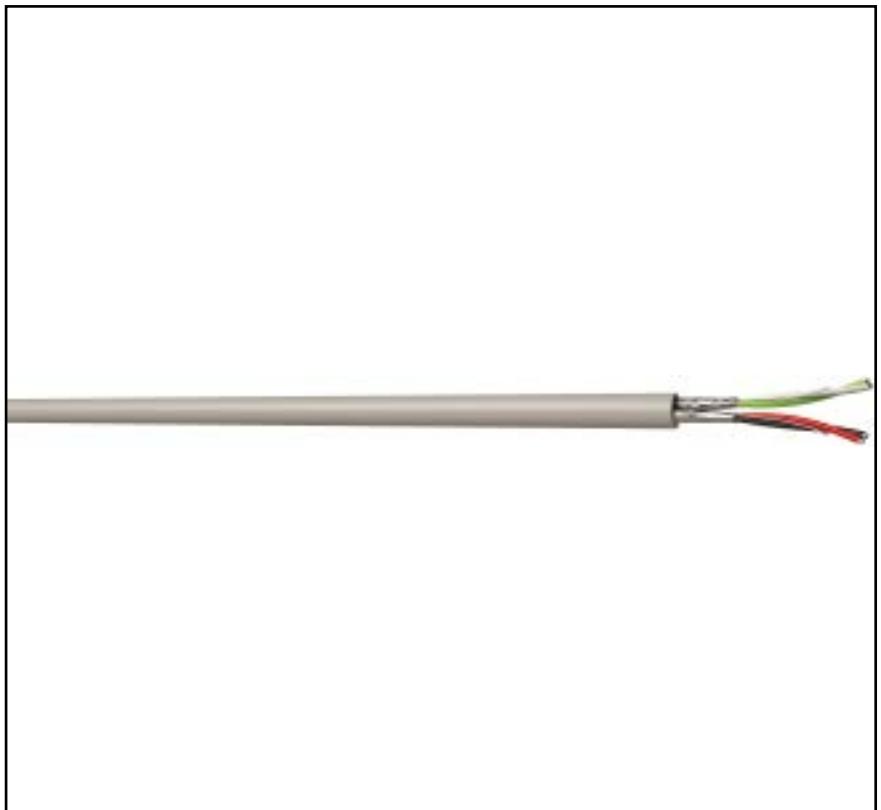

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

cable, insulated with PP, low capacitance, is used for control and data transmission cable in accordance with RS 422 et 485.  
Shielding with aluminium tape on each pair provides very good electromagnetic protection.

## Général specifications

French Fire Standard	NF C32-070 Cat. C2
International Fire Standard	IEC 60332-1
Number of conductor	4
Section	AWG22
Coulor	Grey

## Mechanical Specifications

Conductor material	Tinned copper
Insulation marking mode	Black, Red, Green, White
Type of core assembly	In paires
Type of outer sheath	LSZH Compound
Outer sheath colour	grey
Radius of curvature in fixed installation	8 x Ø
Temperature Fixed Use (-x°C / +x°C)	-30°C / +70°C

## Electrical Specifications

Conductor resistance	≤ 53.5 Ω/km
----------------------	-------------

## Classification

eCl@ss (Version)	
UNSPC (Version)	

**Homologations****Declarations****Similar Products**

Stock No.	Brand	Product Name	Attribute 1	Attribute 2	Attribute 3

**Connection Diagrams / Assembly Diagrams / Illustrations / Accessories**